


VIEW W/OUT SUPT'S

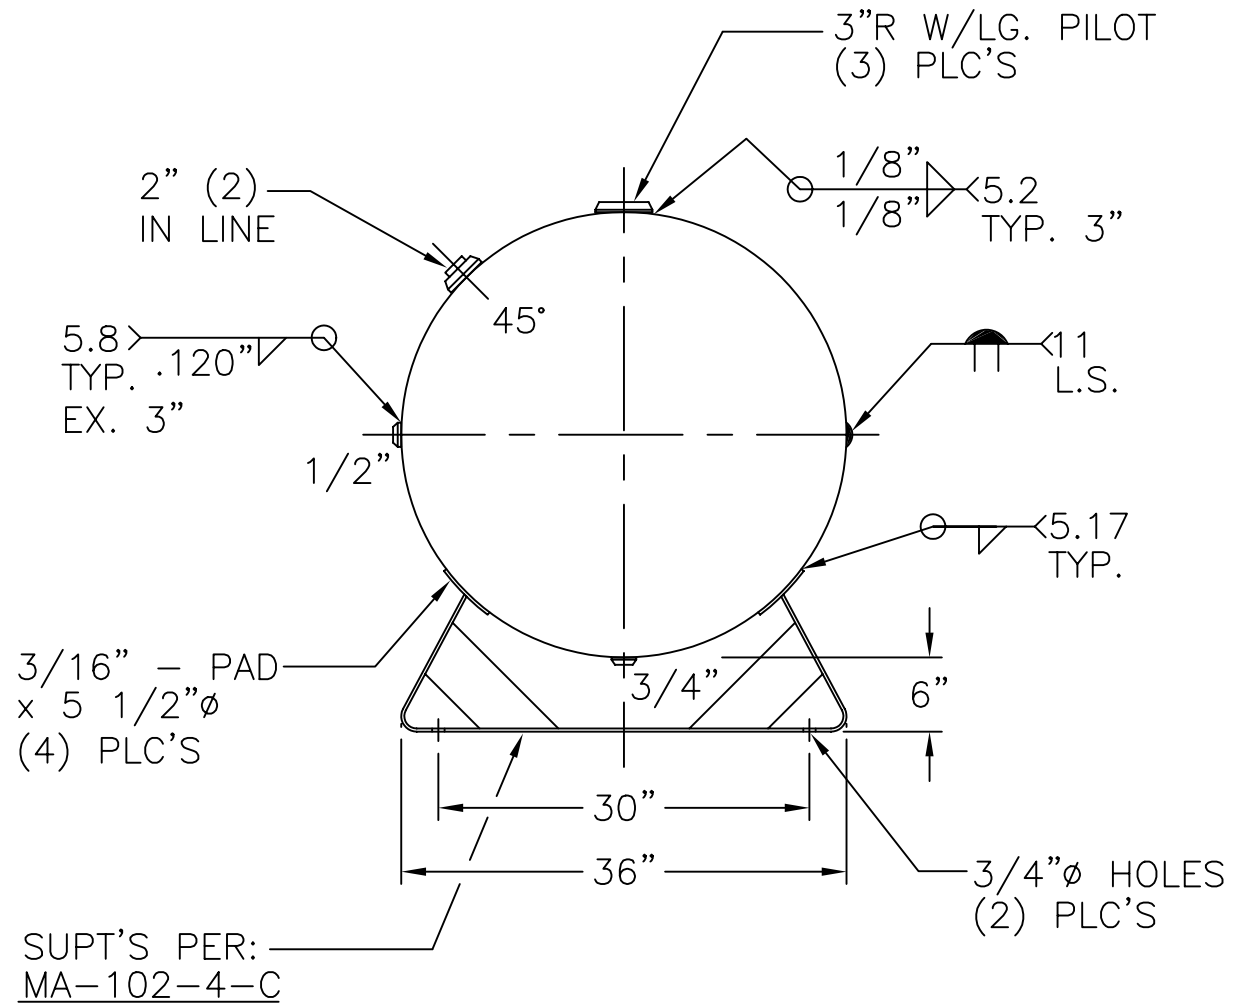

NOTE: 1) HYDRO @ 390 PSIG. MIN.

|       |                                |                                 |               |
|-------|--------------------------------|---------------------------------|---------------|
| HEADS | .337" SA-455 2:1 S.E.          | 36-HD-400-W                     | REV. 11-12-02 |
|       | (.293"MIN.) TRIM               |                                 | DATE: 4-1-87  |
| SHELL | .3125" SA-455 (.296"MIN.)      | FOR: HANSON STANDARD            |               |
|       |                                | HORIZ. AIR TANK                 |               |
|       |                                | INSIDE: UNPAINTED               |               |
|       | M.A.W.P. 300 PSIG. @ 400 °F    | OUTSIDE: PRIME                  |               |
|       | M.D.M.T. -20 °F @ 300 PSIG.    | CAD-"B" SIZE UNDER "STD"-SERIES |               |
|       | ASME SECTION VIII DIV. 1, 2001 | BY: J.G. SCALE: 3/4"=12"        |               |
|       | X-RAY: RT-4 SPOT L.S. ONLY     | ROY E. HANSON JR. MFG.          |               |
|       | GALLONS: 400 WT. 1131 LBS.     | 1924 COMPTON AVE.               |               |
|       | SERIAL NO.                     | LOS ANGELES, CA 90011           |               |