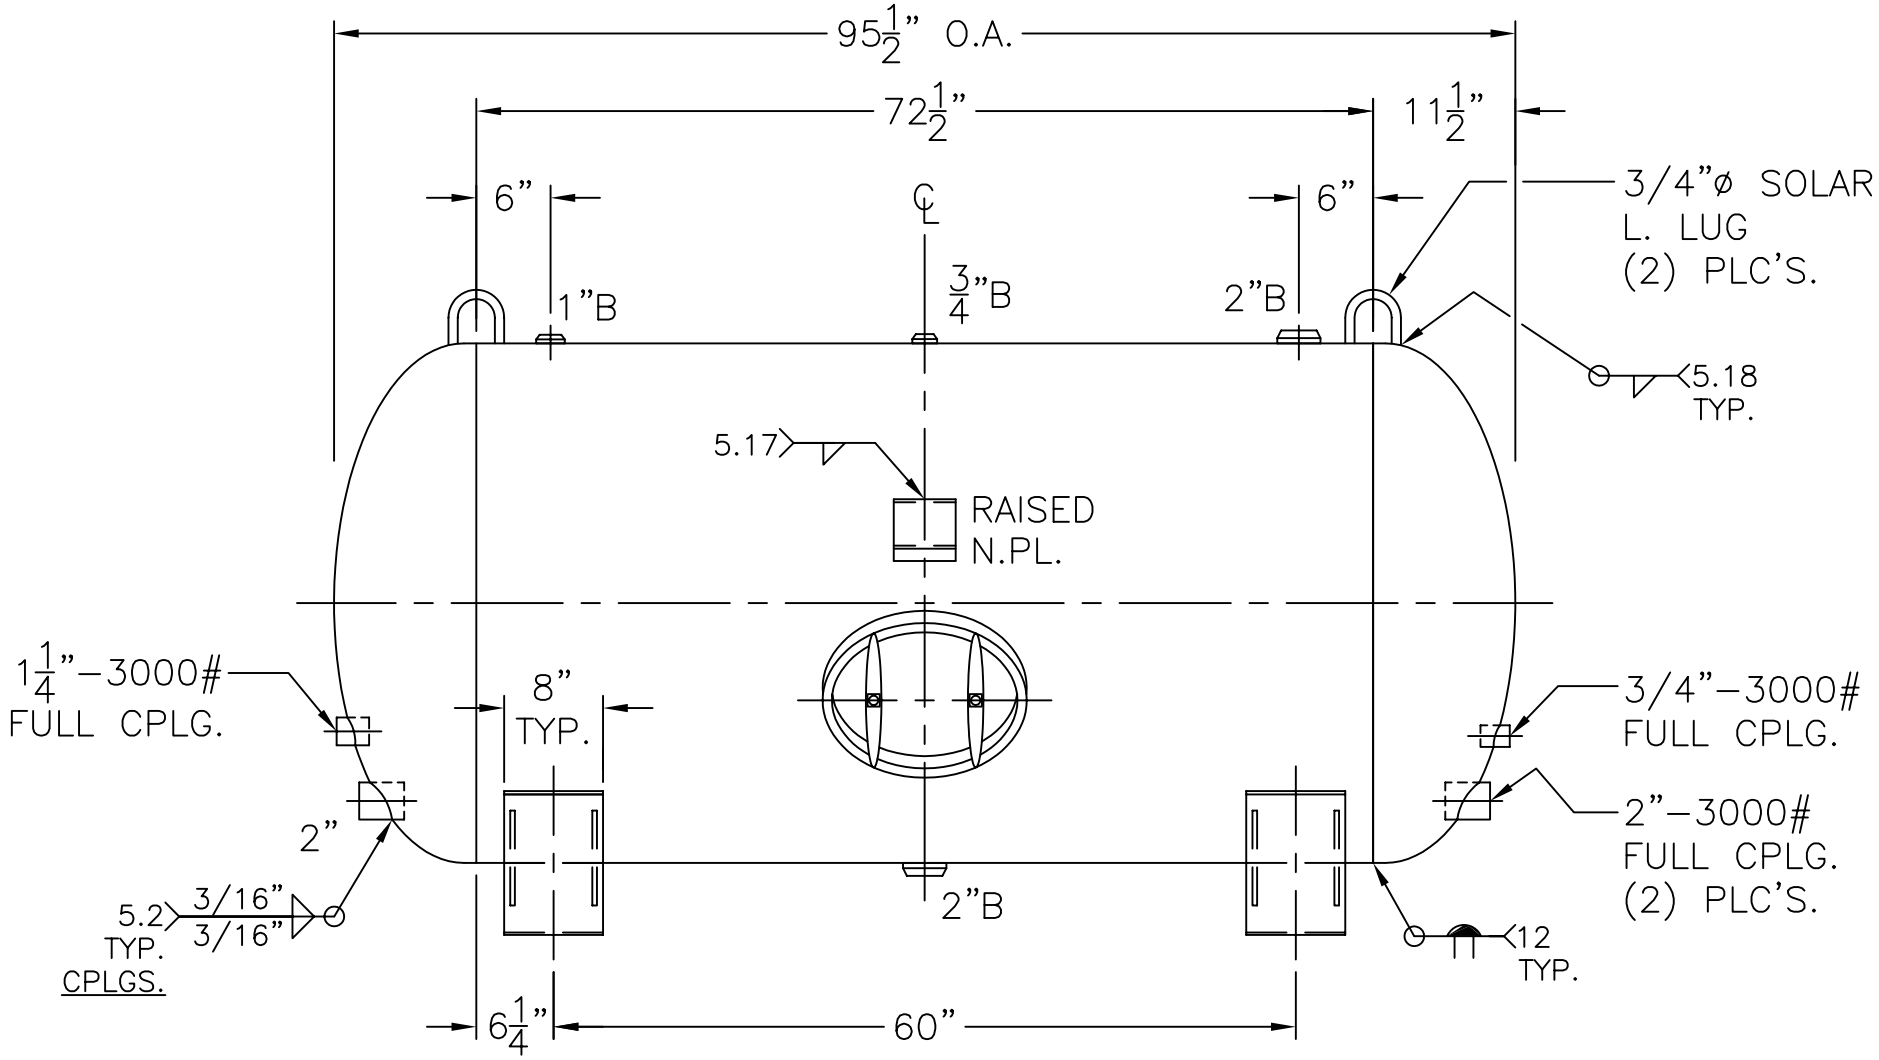

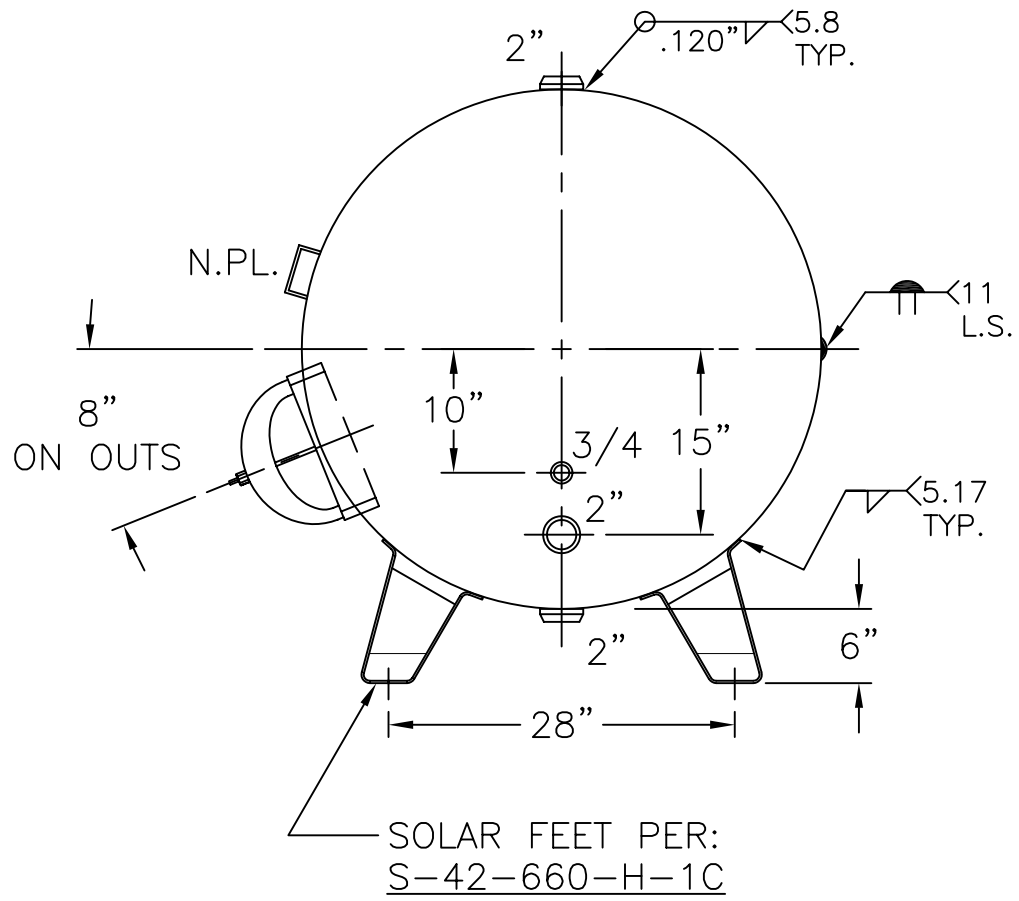

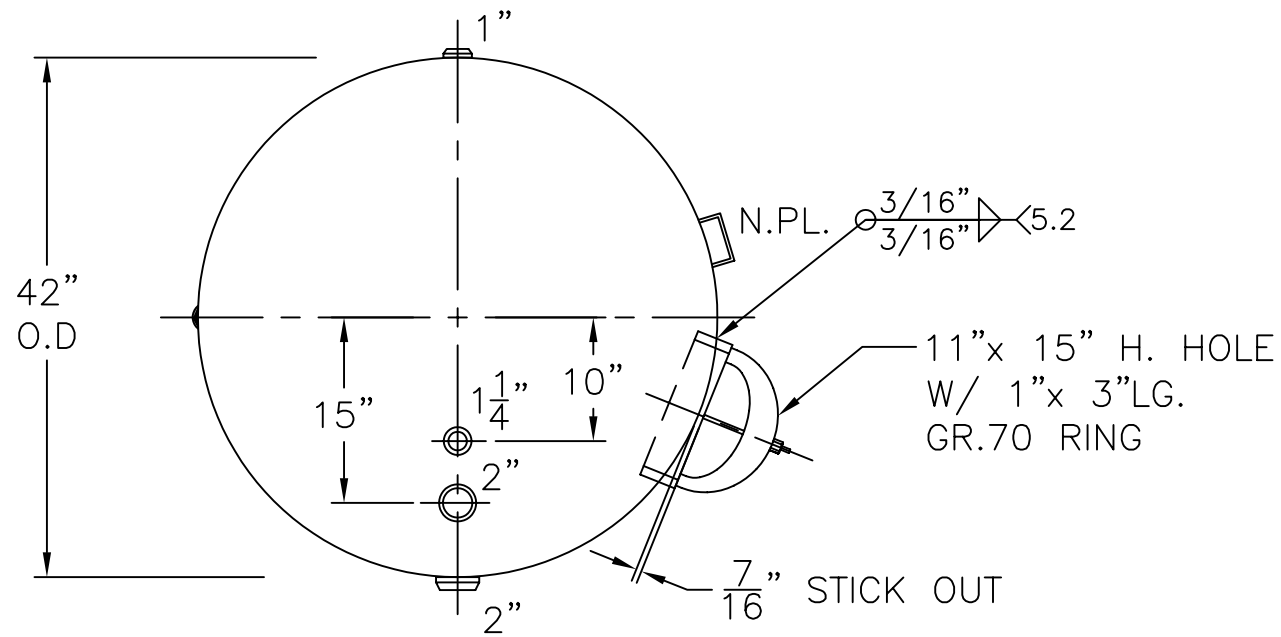

VIEW W/O SUPPORTS

2) 3–19–09 PROOF TEST.
NOTE: 1) HYDRO @ 240 PSIG. MIN.

SHELL / HEADS	.205" SA–455 2:1 S.E.	ES–42–534–H	REV. 6–14–11
	JOGGLE		DATE: 10–2–89
		FOR: HANSON STANDARD	
	.175" SA–414–G	HORIZ. HOT WATER TANK	
		SURFACE AREA = 94.1 SQ. FT.	
M.A.W.P. 160 PSIG. @ 180 °F		INSIDE: EPOXY LINED	
		OUTSIDE: PRIME	
ASME. SECTION Ⅳ 2010 ADD 2010		CAD "B" SIZE UNDER "STD"–SERIES	
X–RAY: RT–NO / H.L.W.		BY: E.S.	SCALE: 3/4"=12"
GALLONS: 534	WT. 885 LBS.	ROY E. HANSON JR. MFG.	
SERIAL NO.		1600 E. WASHINGTON BLVD.	
N.B.		LOS ANGELES, CA 90021	