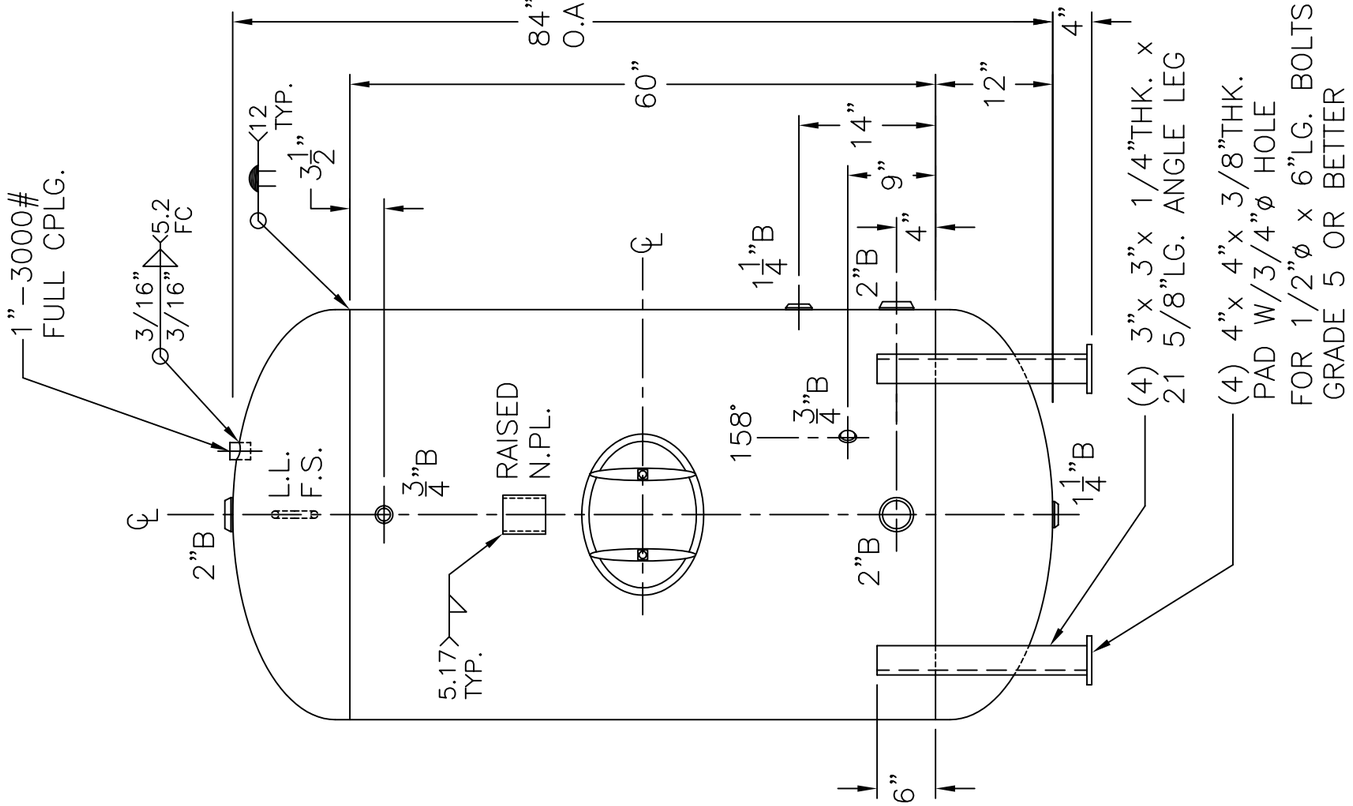

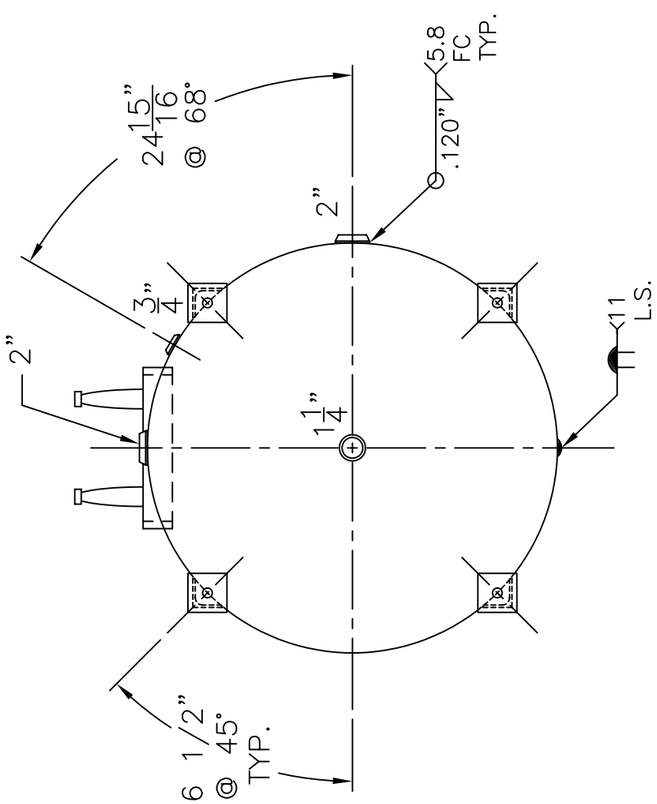

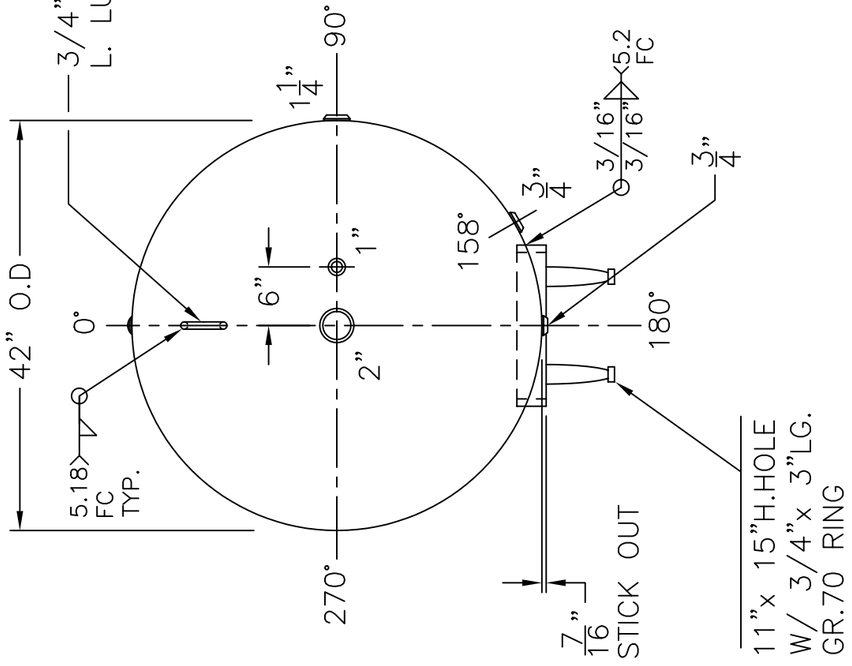

2) 4–1–04 PROOF TEST.
NOTE: 1) HYDRO @ 240 PSIG.

SHELL / HEADS	.205" SA–455 2:1 S.E.
	JOGGLE
	.189 OFFSET – BROWN STRIPE
	.175" SA–414–G
M.A.W.P. 160 PSIG. @ 180 °F	
ASME. SECTION IV 2004 ADD 2006	
X–RAY: RT–NO / H.L.W.	
GALLONS: 462	WT. 794 LBS.
SERIAL NO.	
N.B.	

ES–42–462–V	REV. 1–19–07
	DATE: 5–1–89
FOR: HANSON STANDARD	
VERT. HOT WATER TANK	
SURFACE AREA = 82.8 SQ. FT.	
INSIDE: EPOXY LINED	
OUTSIDE: PRIME	
CAD 'B" SIZE UNDER "STD"–SERIES	
LEG ZONE: 4–15 KM.	
BY: J.G.	SCALE: 3/4"=12"

ROY E. HANSON JR. MFG.
1600 E. WASHINGTON BLVD.
LOS ANGELES, CA 90021