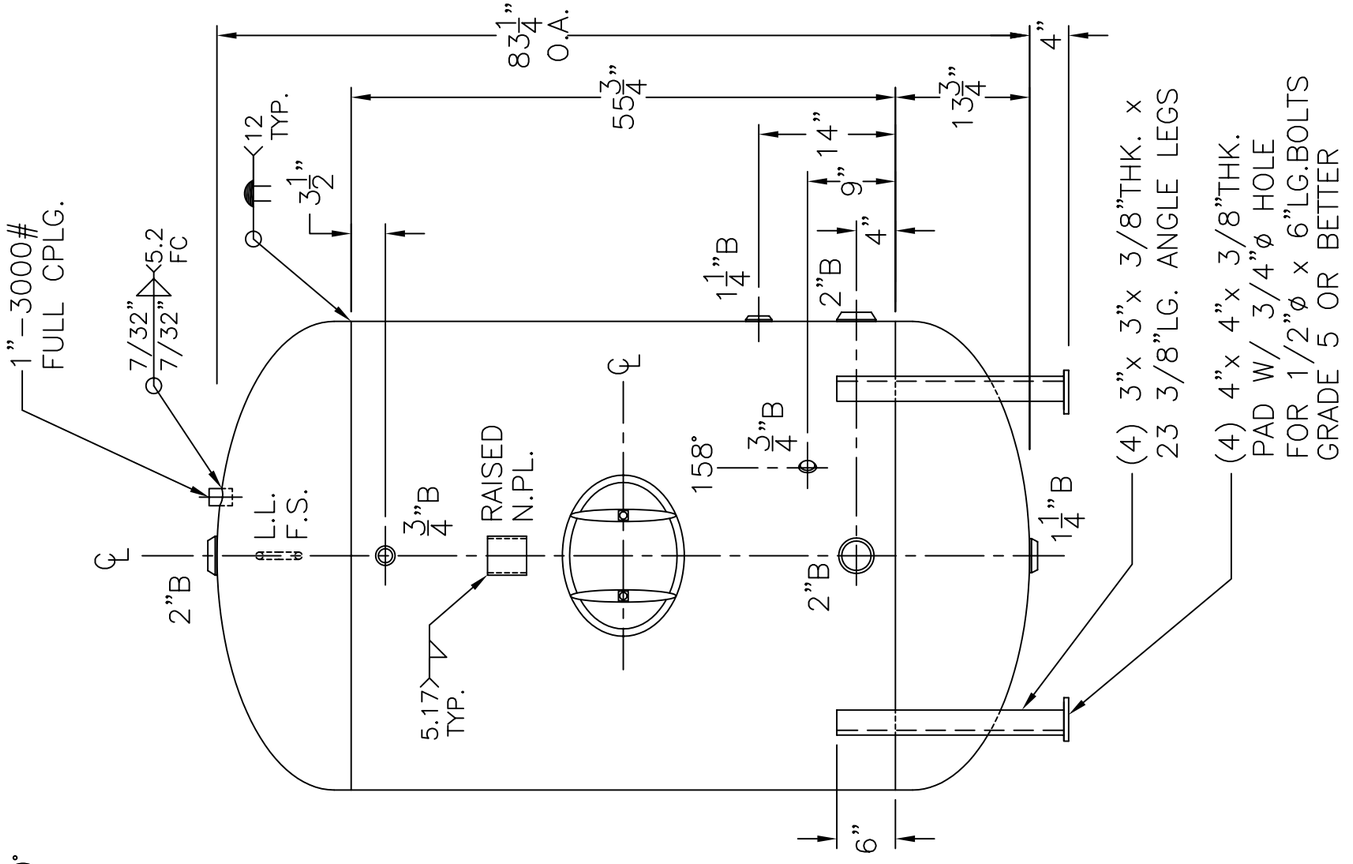

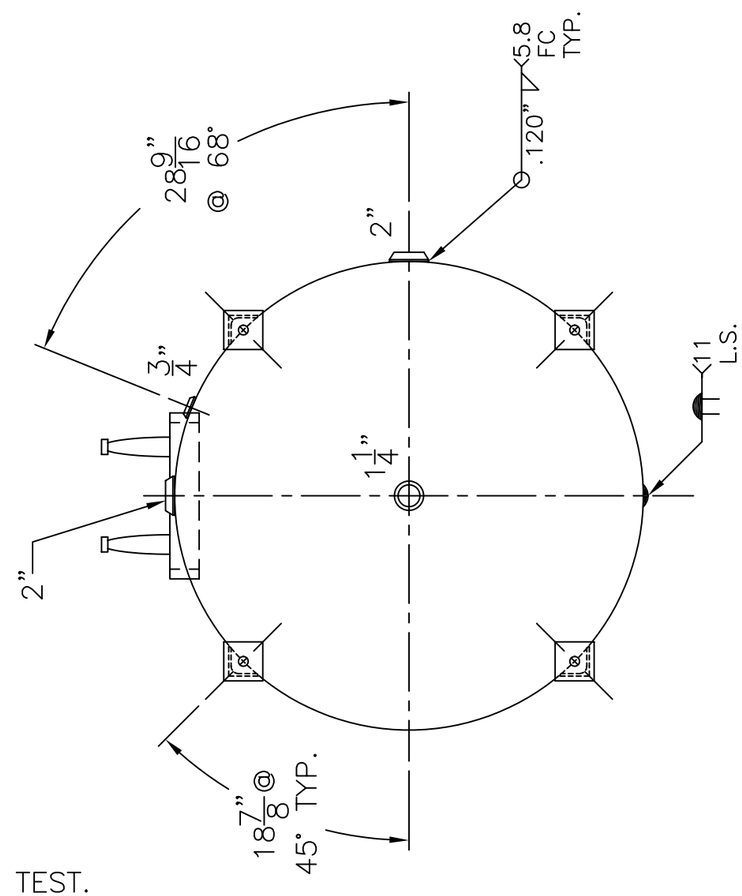

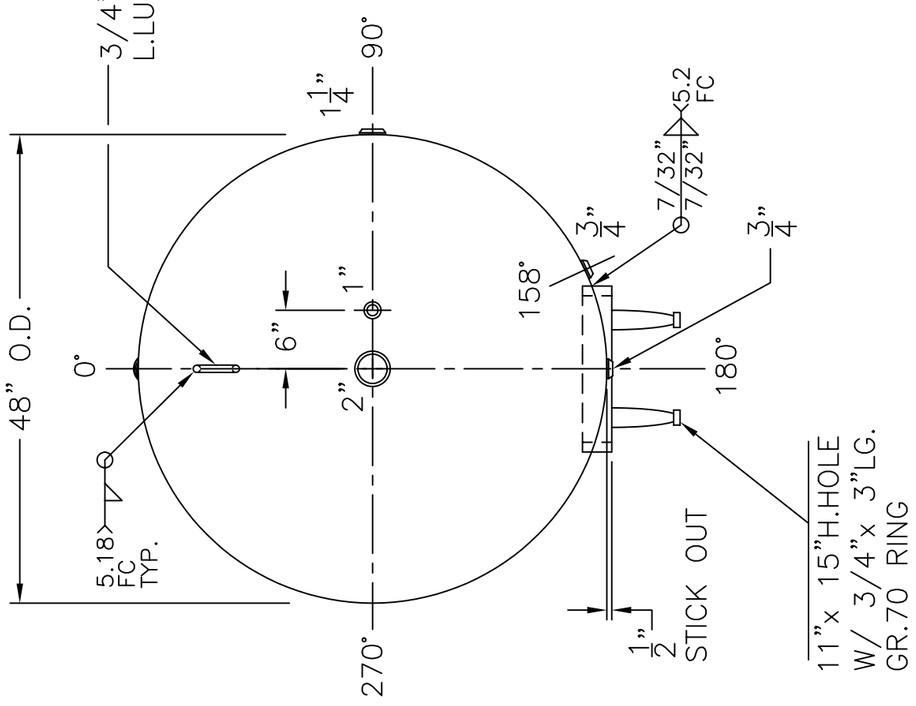

2) 4–22–04 PROOF TEST.

NOTE: 1) HYDRO @ 240 PSIG.

SHELL / HEADS	.245" SA–455 2:1 S.E.	ES–48–585–V	REV. 1–22–07
	JOGGLE – .208 OFFSET		DATE: 5–1–89
		FOR: HANSON STANDARD	
		VERT. WATER TANK.	
	.200" SA–455		
		SURFACE AREA = 94.5 SQ. FT.	
		INSIDE: EPOXY LINED	
M.A.W.P. 160 PSIG. @ 180 °F		OUTSIDE: PRIME	
		LEG–ZONE 4–15 KM.	
ASME. SECTION IV 2004 ADD. 2006		CAD–"B" UNDER "STD"–SERIES	
X–RAY: RT–NO / H.L.W.		BY: J.G.	SCALE: 3/4" =1'
GALLONS: 585	WT. 1014 LBS.	ROY E. HANSON JR. MFG.	
SERIAL NO.		1600 E. WASHINGTON BLVD.	
N.B.		LOS ANGELES, CA 90021	