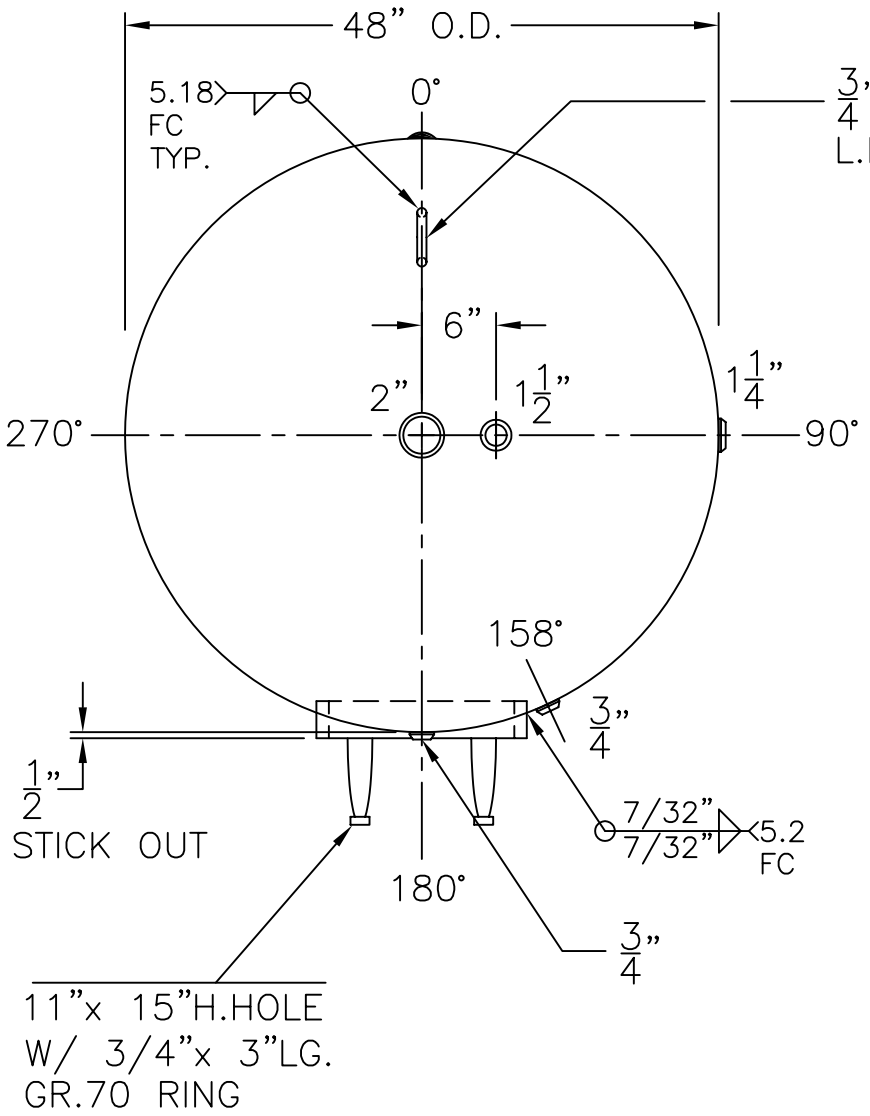

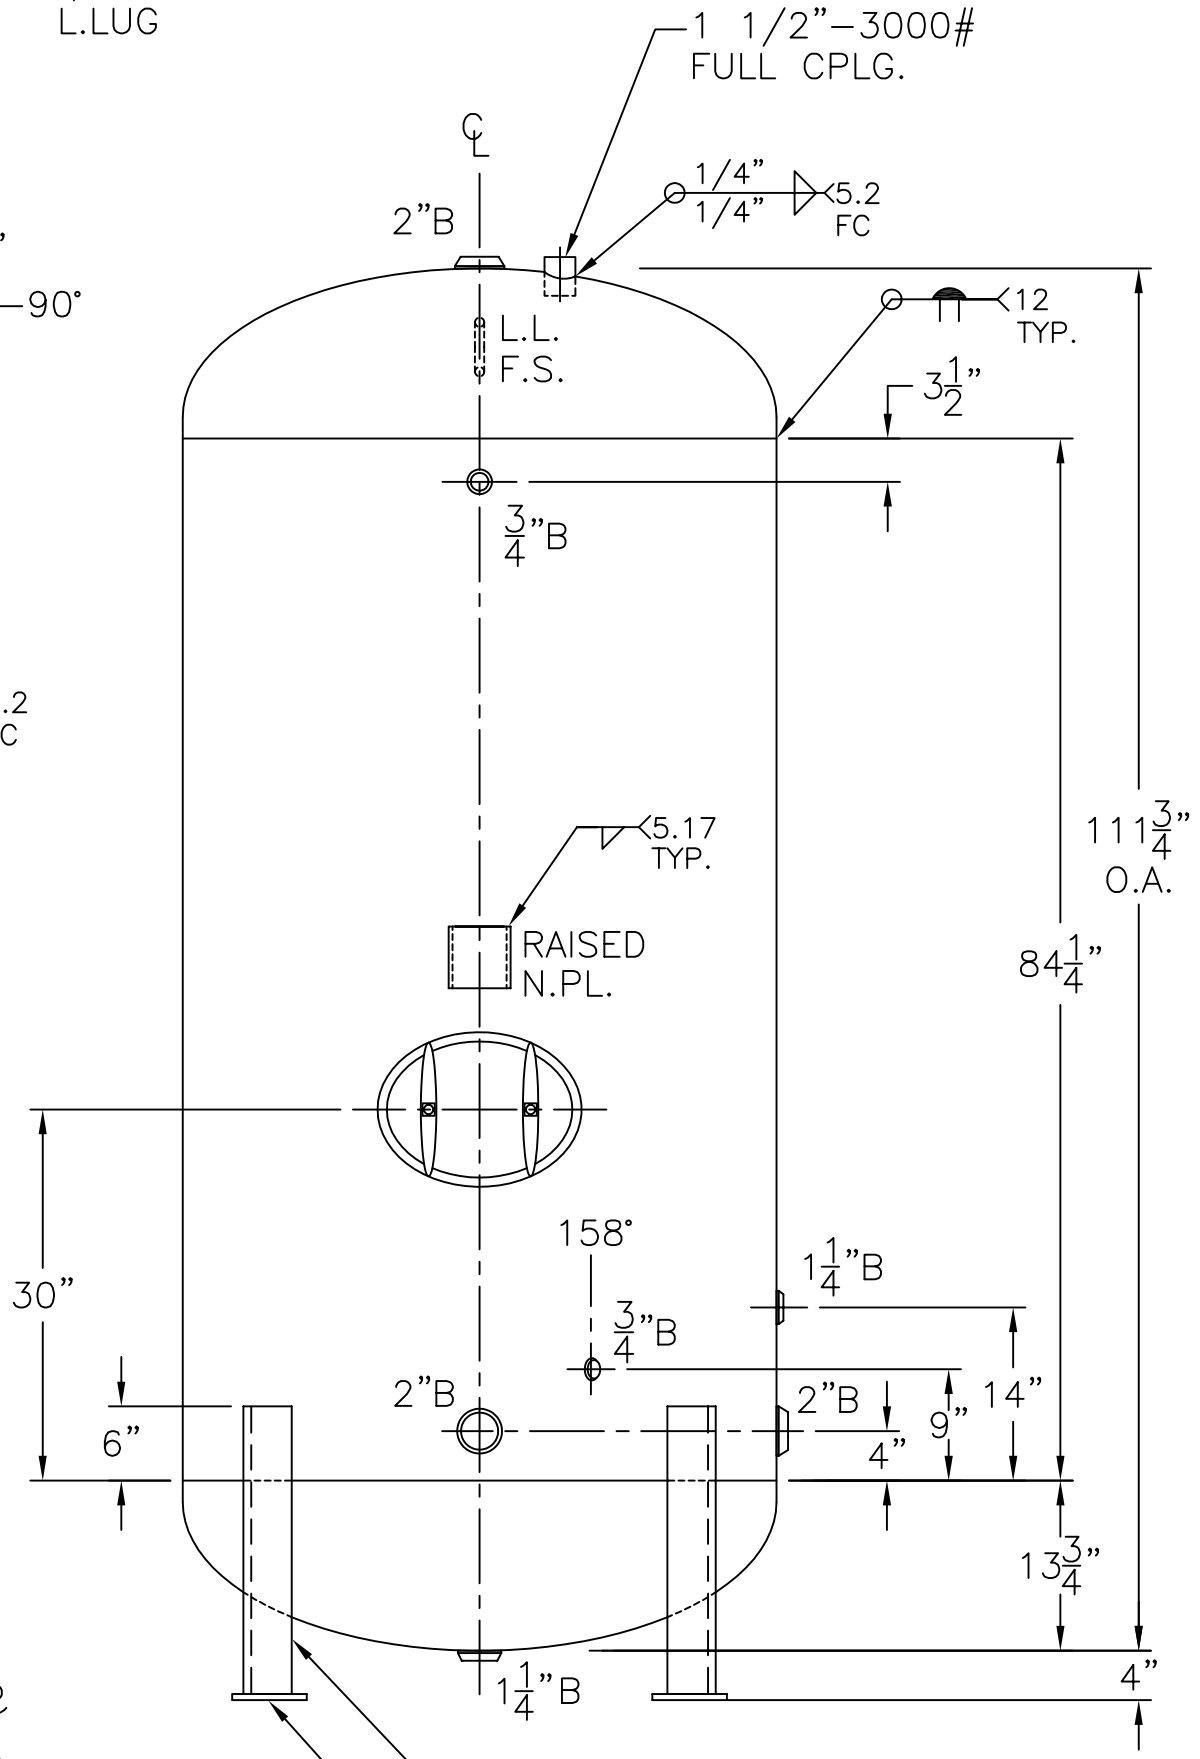

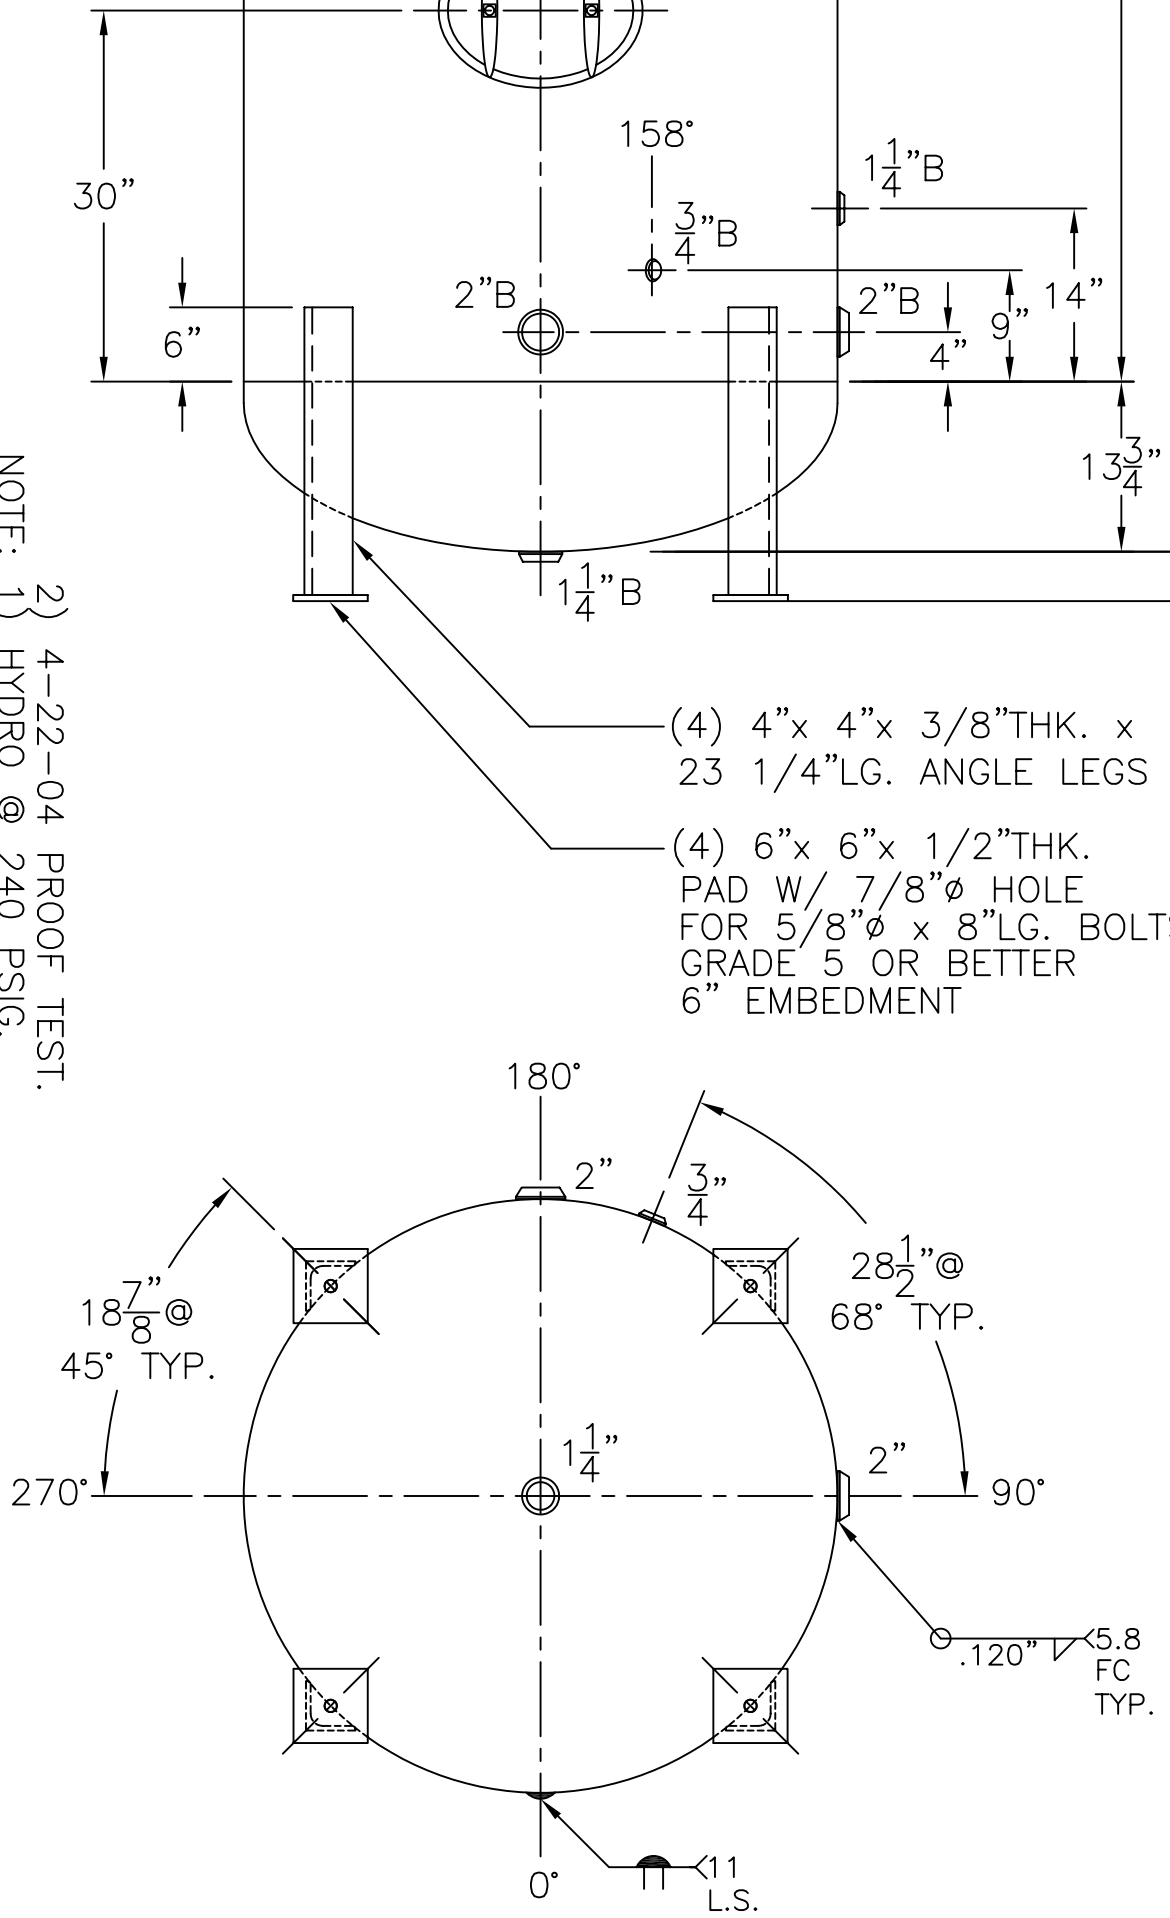

NOTE: 1) HYDRO @ 240 PSIG. 2) 4–22–04 PROOF TEST.

SHELL / HEADS	S.E.
.245" SA–455 2:1 S.E.	
JOGGLE	
.200" SA–455	
M.A.W.P. 160 PSIG. @ 180 °F	
ASME. SECTION VIII 2010 ADD. 2010	
X–RAY: RT–NO / H.L.W.	
GALLONS: 800	WT. 1271 LBS.
SERIAL NO.	
N.B.	

ES–48–800–V	REV. 7–13–11
FOR: HANSON STANDARD	DATE: 9–6–89
VERT. WATER TANK.	
SURFACE AREA = 125.3 SQ. FT.	
INSIDE: EPOXY LINED	
OUTSIDE: PRIME	
LEG–ZONE 4–15 KM.	
CAD–"B" UNDER "STD"–SERIES	
BY: J.G.	SCALE: 3/4"=12"

ROY E. HANSON JR. MFG.
1600 E. WASHINGTON BLVD.
LOS ANGELES, CA 90021